

KNIPEX NexStrip®


Multi-Tool for Electricians

Wire stripper with three functions: stripping wire up to 10 mm², crimping capacity of 4 mm² or 2 x 2.5 mm² and cutting capacity of 10 mm²


- ▶ Precise stripping: automatically adapts to the respective cable diameter and ensures consistent stripping lengths with the adjustable length stop especially with repetitive work
 - ▶ Perfect crimping: fast and even square crimping for individual wire ferrules, the ratchet crimping mechanism guarantees the required crimping pressure
 - ▶ Multi-component grips ensure non-slip, comfortable handling
- > Quick, precise square crimp of single wire ferrules according to DIN 46228 parts 1+4, self-adjusts for sizes 0.25 – 4 mm² / 2 x 2.5 mm² – allows for quick crimping between different sizes
 - > Repetitive, high crimping quality due to ratcheting mechanism with a complete crimping cycle
 - > Stripping with fine adjustment – for optimal adjustment to special materials or temperature conditions for flexible and solid conductors between 0.03 and 10 mm² (AWG 32 – 8)
 - > Cleanly cuts conductors up to 10 mm² (AWG 8)
 - > High-quality housing made of glass fibre reinforced plastic
 - > For the electrical trade: for domestic installations and wiring of electronical devices, such as PLC (programmable logic controller)



12 72 190

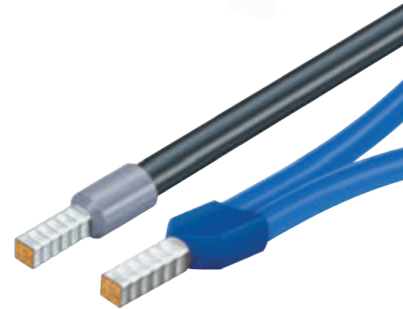

The ratchet crimping mechanism ensures the correct crimping pressure.

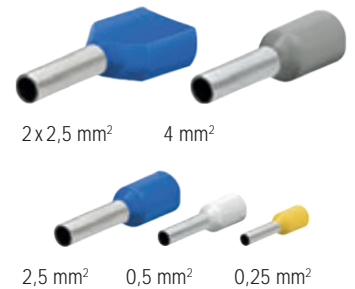

With cable cutter for conductors up to 10 mm².



Automatic stripping up to 10 mm².



Square crimping die for wire ferrules of 0.25 – 4 mm².



The fine adjustment feature allows reliable stripping in all operating conditions like extreme temperatures or special insulating material.

Article no.	EAN 4003773-	↔ mm	Handles	Application	Capacity mm ²	AWG	⚖ g
12 72 190	088165	190	non-slip	Cutting	Cutting up to 10	8	170
				Stripping	Stripping from 0.03 to 10		
				Square compression	Crimping of single wire ferrules from 0.25 to 4 Crimping of twin wire ferrules 2 x 2,5	32 – 8	
12 49 21	057581			Spare blades block for 12 72 190			8
12 49 23	057604			Spare length stop for 12 72 190			46